

OX4000 Optical Switches

Optical Switches for Fiber Network Monitoring

VeEX® OX4000 series optical switches provide reliable, fast, and repeatable performance. Units can be controlled via built-in keypad or remotely via RS232 or Ethernet Remote Fiber Test Systems (RFTS).

Platform Highlights

- 1x8, 1x16, 1x24, 1x32, 1x64 and 1x128 configurations
- LCD screen with Auto-off backlight: displays current channel and related information
- RJ45 Ethernet port supports switch admin functions
- RS-232: DB9 communication port for PC connection
- Automatic scanning capability available
- High reliability and lifetime > 10 Million cycles
- High quality, low reflectance SC/APC adaptors
- Dual AC and Dual DC power supply options

Optical Characteristics

- Low insertion loss, < 1.5 dB typical (< 128 channels)
- Fast switching time, < 10 ms for adjacent channels
- Protocol and bit-rate independent
- Singlemode fiber support
- Wideband wavelength operating range
- Low reflectance and ORL
- 1625 nm and 1650 nm wavelength support for in-service monitoring applications

Optical Port Configurations

OX4008 (1U)



OX4016 (2U)




OX4024 (2U)



OX4032 (2U)



OX4064 (3U)

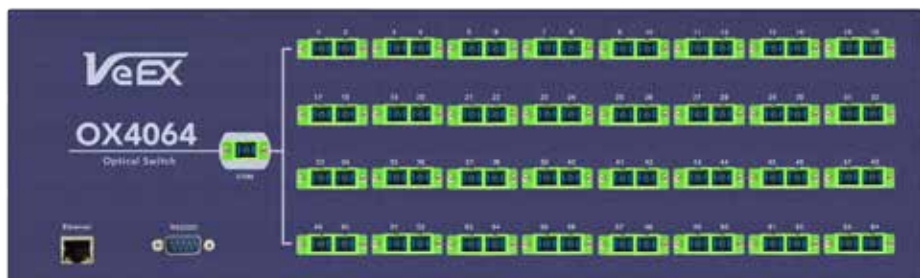

OX4128 (4U)



Specifications

Optical Parameter	OX4008/16/24/32/64	OX4128
Number of channels (1xn)	8/16/24/32/64	128
Operating wavelength (nm)	1260 to 1650	
Test wavelength (nm)	1310 /1550	1550
Insertion loss (dB)	≤ 1.2 dB	< 1.5 (Typ), < 2.0 (Max)
Repeatability (dB)	≤ ± 0.05	≤ ± 0.02
Return loss (dB)	≥ 50	
Crosstalk (dB)	≥ 55	
WDL (dB)	≤ 0.25	
PDL (dB)	≤ 0.05	
Switching time (ms)	≤ 8 (adjacent channels)	≤ 10 (adjacent channels)
Fiber type (μm)	Singlemode, (9/125)	
Reliability	> 10 Million cycles	
Optical Power	< 500 mW	
Connector type	SC/APC	
Monitor/configuration ports	RJ45, RS-232	
AC Power supply: Dual (Volts)	85 to 264 VAC, 50/60 Hz	
DC Power supply: Dual (Volts)	36 to 72 VDC	
Operating temperature (°C)	-5 to + 55	-10 to + 60
Storage temperature (°C)	-40 to + 80	
Dimensions (mm) OX4008 OX4016/24/32 OX4064 OX4128	483 × 303 × 44 (1U) 483 × 303 × 89 (2U) 483 × 303 × 132 (3U)	483 × 310 × 177 (4U)
Weight (kg) OX4008 OX4016 OX4024/32 OX4064 OX4128	4.7 5.5 6 7	8.5

Ordering Information

Z06-99-095P	OX4008 Optical Switch 1x8 Ports (1U), 1260-1650 nm with Fixed SCAPC Connector
Z06-99-096P	OX4016 Optical Switch 1x16 Ports (2U), 1260-1650 nm with Fixed SCAPC Connector
Z06-99-097P	OX4024 Optical Switch 1x24 Ports (2U), 1260-1650 nm with Fixed SCAPC Connector
Z06-99-098P	OX4032 Optical Switch 1x32 Ports (2U), 1260-1650 nm with Fixed SCAPC Connector
Z06-99-099P	OX4064 Optical Switch 1x64 Ports (3U), 1260-1650 nm with Fixed SCAPC Connector
Z06-99-100P	OX4128 Optical Switch 1x128 Ports (4U), 1260-1650 nm with Fixed SCAPC Connector
Z66-00-189P	OX4000 Power Supply, Dual AC (85-264 VAC)
Z66-00-190P	OX4000 Power Supply, Dual DC (36-72 VDC)



VeEX Inc.
2827 Lakeview Court
Fremont, CA 94538 USA
Tel: +1.510.651.0500
Fax: +1.510.651.0505
www.veexinc.com
customercare@veexinc.com

© 2017 VeEX Inc. All rights reserved.
VeEX is a registered trademark of VeEX Inc. The information contained in this document is accurate. However, we reserve the right to change any contents at any time without notice. We accept no responsibility for any errors or omissions. In case of discrepancy, the web version takes precedence over any printed literature.
D05-00-135P A00 2017/08